


PCM-9590

Onboard Intel® Core™ 2 Duo EBX SBC with
VGA/ LVDS /Dual GbE LAN/ Audio/ PCI-104

NEW

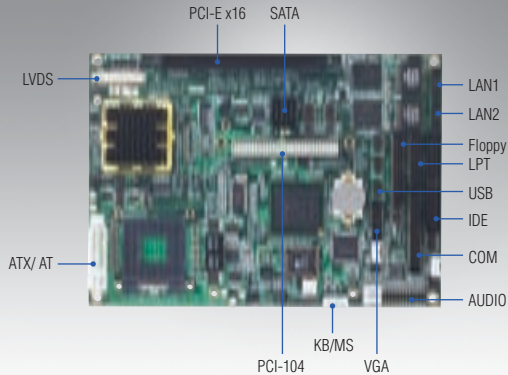

Features


- Embedded Intel® Core™ 2 Duo CPU (2 MB L2 cache)
- Up to 4 GB DDR2 SODIMM (support FSB 533/667 MHz)
- Integrate Intel® Graphics Media Accelerator (GMA) 950
- Supports Dual independent display (36-bit LVDS + VGA)
- Supports two Ethernet up to 10/100/1000 Mbps
- One PCI-104, one PCIe x16, one mini PCI
- Supports six USB 2.0 ports
- Supports four COMs
- Two SATAII Ports (300MB/s)
- 16-bit GPIO



Specifications

Processor System	CPU	Intel Core 2 Duo/ Core Duo/ Core Solo/Celeron M Processor supported (Socket type)
	Front Side Bus	533/667 MHz
	L2 Cache	512 KB - 4 MB
	Chipset	Intel 945GM + ICH7M
	BIOS	Award 4 Mbit
Memory	Technology	DDR2 400/533/667
	Max. Capacity	4 GB
	Socket	2 x 200-pin SODIMM
SSD	CompactFlash	Card Type I, Type II (shared 2nd IDE Channel)
I/O Interface	LPT	1
	RS-232	3
	RS-232/422/485	1
	K/B	1
	Mouse	1
	USB	6 x USB 2.0
	Audio	HD Audio, supports 7.1 channel: Speaker out, CD-input, Line-in, Line-out, Mic-in
	GPIO	16-bit general purpose input/output
SATA	Max. Data Transfer Rate	150
	Channel	2
EIDE	Mode	UDMA 100
	Channel	1
Expansion Slot	PCIe	1 x PCIe x16
	miniPCI	1
	PCI-104	1
Ethernet	Speed	10/100/1000Mbps
	Controller	2 x Intel 82573L
	Interface	2 x RJ-45 by cable
Display	Controller	Intel 945GM
	VRAM	Optimized Shared Memory Architecture up to 224 MB system memory
	LVDS LCD	1 x 36-bit LVDS
Environment	Dual Independent Display	CRT + LVDS system 36-bit LVDS (945 GM) LCD Panel Dual independent display options with digital display
	Operation Temperature	0 ~ 60° C (32 ~ 140° F)
	Operating Humidity	0% ~ 90% relative humidity, non-condensing
Power	Power Type	AT / ATX
	Power Supply Voltage	ATX, +5 V ± 5%, ±12 V ± 5% (For PCI Card, FAN power, and LVDS inverter power, CPU core power) AT, +5 V ± 5%, ±12 V ± 5% (For PCI Card, FAN power, and LVDS inverter power, CPU core power)
	Power Consumption: Typical	Suspend: 0.96 A @ 5 V, 0.81 A @ 12 V (CPU T7400 2.16 GHz) Suspend: 1.01 A @ 5 V, 0.76 A @ 12 V (CPU U2500 1.2 GHz)
	Power Consumption: Max, test in HCT	1.03 A @ 5 V, 2.09 A @ 12 V (CPU T7400 2.16 GHz) 1.05 A @ 5 V, 0.98 A @ 12 V (CPU U2500 1.2 GHz)
	Power Management	APM, ACPI
	Battery	Lithium 3 V / 196 mAH
	Watchdog Timer	Output
Interval		Programmable 1 ~ 255 sec
Physical Characteristics	Dimensions (L x W)	203 x 146 mm (8" x 5.75")
	Weight	0.85 kg (1.87 lb) (weight of total package)

Board Diagram

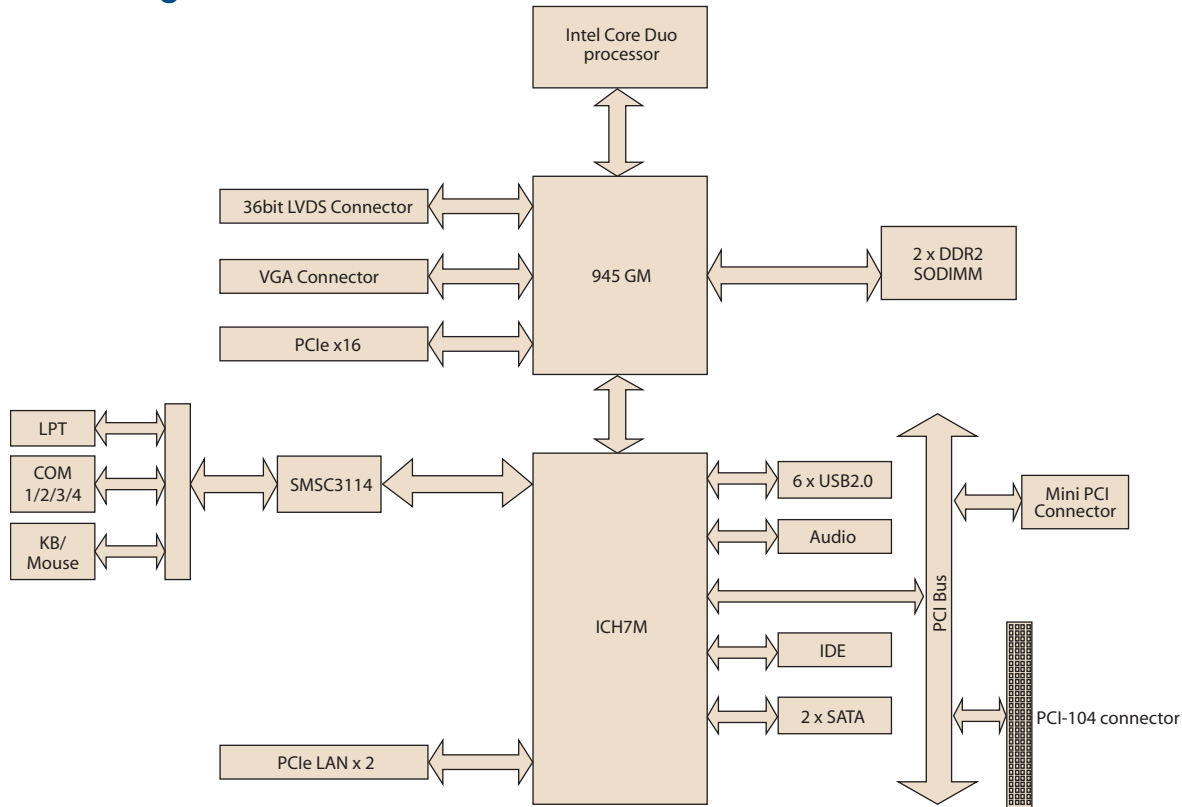

Ordering Information

Part No.	CPU	L2 Cache	DDR2 SODIMM	CRT	LVDS	GigaLAN	Audio	USB2.0	RS-232	RS/232/422/485	LPT	PCIe x16 Slot	MIO Type I	Mini PCI	Thermal Solution	Operation Temp.
PCM-9590FG-00A1E	Socket 479	-	2	Yes	36-bit	2	Yes	6	3	1	Yes	1	Yes	1	Active	0 - 60° C
PCM-9590FG-S2A1E	Core Duo 1.2 GHz	2 MB	2	Yes	36-bit	2	Yes	6	3	1	Yes	1	Yes	1	Passive	0 - 60° C

Optional Accessories

Part No.	Description
PCM-10586-9590E	Wiring kit for PCM-9590
1703100260	USB cable (26 cm)
1703100121	USB cable (12 cm)
1700006200	AT Power Cable 6*2P to 10*2P 100mm PCM-9590
PCM-110-00A3E	1-slot PCI riser card for 5.25" biscuits
PCM-120-00A3E	2-slot PCI riser card for 5.25" biscuits
PCM-200-00A2E	PCI-104 to PCI bus module
MIO-3120-00A1E	Mini PCI interface to Wireless 802.11 b/g communication module
MIO-3121-00A1E	Mini PCI to 4 COM Module
MIO-3140-00A1E	Mini PCI interface to SATA storage module
MIO-3150-00A1E	Mini PCI interface to video capture module
MIO-3130-00A1E	Mini PCI Interface to Dual LAN Communication Module
MIO-3131-00A1E	Mini PCI Interface to Single Giga LAN Communication Module

Packing List

Part No.	Description	Quantity
	PCM-9590 SBC	1
9689000002	Mini Jumper Pack	1
	Startup Manual	1
	Utility CD	1
1700000265	ATX Power Cable	1
170304015K	12V for CPU Big4P x 2 power cable	1
	Cooler 51 x 51x 40 mm (PCM-9590FG-00A1E only)	1
	heatsink 50 x 50 x 30 mm (PCM-9590FG-S2A1E only)	1

- Computer On Modules **1**
- Embedded Single Board Computers **2**
- Compact Embedded Computers **3**
- Pre-configured Systems **4**
- Industrial Motherboards **5**
- Slot Single Board Computers **6**
- Industrial Computer Chassis **7**
- Industrial Computer Peripherals **8**
- Panel PCs **9**
- Display Solutions **10**
- Digital Video Solutions **11**
- Vehicle Mounted Computers **12**
- Portable Computers **13**
- M2M Modules **14**
- Embedded Software Services **15**