

IPC-602

2U 6槽上架式机箱
支持前置USB和PS2接口




特性

- 2U高6槽上架式机箱
- 支持1个5.25"和2个3.5" 磁盘驱动器(一个可前置, 一个可内置)
- 蝶型背板设计
- 前置USB和PS/2接口
- 250 W/300 W AC ATX和DC电源选择
- 2个40-CFM冷却风扇附带空气过滤装置
- 最佳的CPU卡系统集成性能
- 可锁式前舱门杜绝未经授权使用




规格

磁盘驱动器	3.5"	可前置 1	可内置 1
	5.25"	1	
冷却系统	风扇	2 (40 CFM each)	
	防尘过滤网	有	
I/O 接口	USB	2 (前置)	
	PS/2	PS/2 Keyboard & mouse, or PS/2 keyboard only, 取决于所使用CPU卡	
其它功能	指示灯	LED 显示电源状况和硬盘活动状态	
	后面板	Reserved one 9-pin D-SUB opening	
环境	温度	工作状态 0 ~ 40 °C (32 ~ 104 °F)	非工作状态 -20 ~ 60 °C (-4 ~ 140 °F)
	湿度	10 ~ 85 % @ 40 °C, non-condensing	
	震动 (5-500 Hz)	0.5 Grms	2 G
	冲击	10 G (11毫米周期半正弦波)	30 G
	噪音	在5 ~ 28 °C 小于52分贝(41 ~ 82 °F)	
	海拔高度	0 to 3,048 m (0 ~ 10,000 ft)	
	外观	尺寸 (W x H x D)	482 x 88 x 450 mm (19" x 3.5" x 17.7")
	净重	10.7 kg (23.6 lb)	
	毛重	13.0 kg (28.6 lb)	

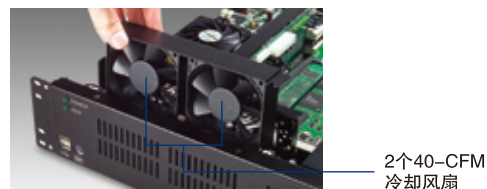

尺寸表

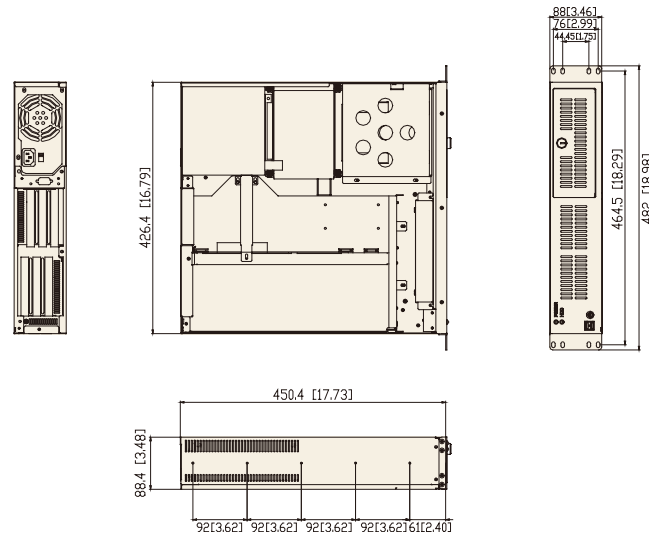

单位: mm (英寸)

- 1 工业母板
- 2 工业母板机箱
- 3 PICMG1.3 计算平台
- 4 单板电脑
- 5 工控机箱
- 6 工控机周边设备

电源选型表

型号	功率	输入	输出	规格	安全认证	平均无故障时间
PS-250ATX-Z (ATX, PFC)	250 W	AC 115/230 V (selectable)	+5 V @ 27 A, +3.3 V @ 20 A +12 V @ 13 A, -12 V @ 0.8 A -5 V @ 0.3 A, +5 Vsb @ 2 A	最小负载 +5 V @ 1.5 A +12 V @ 0.3 A	UL/TUV/CB/CCC	100,000 hours @ 25
PS-300ATX-ZB (ATX, PFC)	300 W	AC 100 ~ 240 V (full-range)	+5 V @ 30 A, +3.3 V @ 28 A +12 V @ 15 A, -12 V @ 0.8 A -5 V @ 0.3 A, +5 Vsb @ 2 A	+5 V @ 0.1 A +3.3 V @ 0.3 A	UL/TUV/CB/CCC	100,000 hours @ 25
PS-400ATX-ZB (ATX, PFC)	400 W	AC 100 ~ 240 V (full-range)	+5 V @ 35 A, +3.3 V @ 25 A +12 V @ 30 A, -12 V @ 1 A -5 V @ 0.8 A, +5 Vsb @ 2 A	+5 V @ 3 A +12 V @ 1 A +3.3 V @ 1 A	UL/TUV/CB/CCC	91,000 hours @ 25
PS-300ATX-DC48 (ATX)	300 W	DC -48 V	+3.3 V @ 28 A, +5 V @ 30 A, +12 V @ 15 A, -5 V @ 0.3 A, -12 V @ 0.8 A, +5 Vsb @ 2 A	+5 V @ 0.3 A, +3.3 V @ 0.3 A, +12 V @ 0.2 A	UL/TUV/CB/CCC	100,000 hours @ 25

存储设备选型表

型号	描述
1701400652	HDD cable, ATA 66/100, 45 cm + 20 cm
1750000257	2U-high P4 Socket 478 CPU cooler up to 3.2 GHz (89 W)
1759214200	Low profile P4 CPU cooler up to 2.8 GHz (0.13 micron 70 W)
1999000630	Fan filter 162 x 54 x 5 mm
199902K000	Door filter
96CD-52X-I-AS-B2	Black 5.25" 52X CD-ROM
96DVR-40X-I-AS-B	Black 5.25" 16X/40X/24X DVDRW-ROM
96FDD-144-TE-B	Black 3.5" FDD
SCD COMBO	Black 5.25" compact storage kit with slim 24X CD-ROM and a 3.5" drive bay for FDD or HDD
SDVD-COMBO	Black 5.25" compact storage kit with slim-type 8X DVD + 24X CD-RW and a 3.5" drive bay for HDD/FDD
SCD-FDD-COMBO	Black 5.25" storage kit with slim 24X CD-ROM and standard 3.5" black FDD
SDVD-FDD-COMBO	Black 5.25" storage kit with slim-type 8X DVD + 24XCD-RW and standard 3.5" FDD

订购信息

型号	电源	背板	安全认证
IPC-602P3-00XBE	Without power supply, with ATX switch	PCA-6106P3V-0B1	None
IPC-602P3-25ZBE	PS-250ATX-Z	PCA-6106P3V-0B1	CE
IPC-602P3-30ZBE	PS-300ATX-ZB	PCA-6106P3V-0B1	CE
IPC-602P4-00XBE	Without power supply, with ATX switch	PCA-6105P4V-0B2	None
IPC-602P4-25ZBE	PS-250ATX-Z	PCA-6105P4V-0B2	CE
IPC-602P4-30ZBE	PS-300ATX-ZB	PCA-6105P4V-0B2	CE