

DC 输入开放式框架 ATX 电源

ACE-709VX/CX/TX

DC 输入开放式框架 ATX 电源




订购信息


1 x +5Vsb & 电源开关线

输入类型	9 ~ 16 VDC (ACE-709VX), 18 ~ 32 VDC (ACE-709CX), 36 ~ 72 VDC (ACE-709TX)					
输出电压	+3.3 V	+5 V	+12 V	-5 V	-12 V	+5 Vsb
ACE-709VX		8 A	2.5 A		0.5 A	0.5 A
ACE-709CX/TX		10 A	2.5 A		0.5 A	0.5 A
效率	75% (ACE-709VX/CX), 70% (ACE-709TX)					
温度	操作: -20°C ~ 70°C (50°C ~ 70°C 降负荷曲线) 存储: -20°C ~ 85°C					
MTBF(hrs)	162,000 (ACE-709VX), 158,000 (ACE-709CX), 170,000 (ACE-709TX)					
输出连接器	可选线材					
尺寸	152.4 x 89 x 39 mm					

尺寸

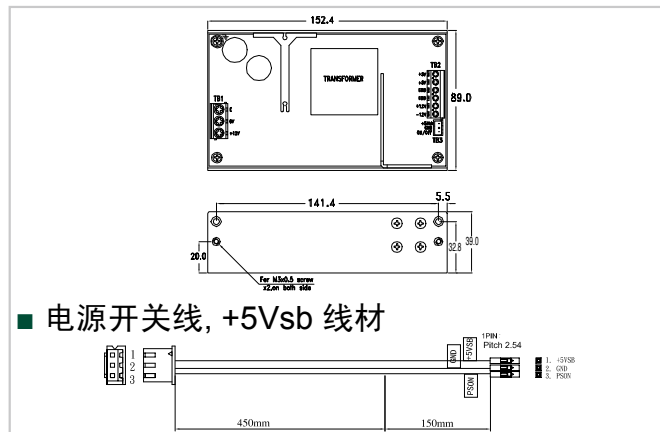

■ 电源开关线, +5Vsb 线材



可选 1



嵌入式解决方案

PN: CB-709EB-RS
30 cm DC cable to CPU card, with 20-pin ATX, HDD and SATA connectors

可选 2



ATX 底板解决方案

PN: CB-709BP-RS
30 cm DC cable to backplane, with 20-pin ATX, HDD and SATA connectors

1
工业电脑
解决方案2
视频采集
解决方案3
嵌入式系统
解决方案4
工业数据
采集与控制5
平板电脑
解决方案
概览6
ORing
网络通讯7
电源与外设


DC 输入开放式框架 AT 电源

ACE-890V/C/T/P

DC 输入开放式框架 AT 电源



输入类型	9 ~ 16 VDC (ACE-890V), 18 ~ 36 VDC (ACE-890C), 36 ~ 72 VDC (ACE-890T), 70 ~ 132 VDC (ACE-890P)					
输出电压	+5 V	+12 V	-5 V	-12 V	+24 V	
ACE-890V	9 A	2 A		0.3 A		
ACE-890C/T/P	10 A	2.5 A		0.5 A		
效率	70%					
温度	0°C ~ 50°C (操作), -20°C ~ 85°C (存储)					
MTBF(hrs)	245,000 (ACE-890V), 251,000 (ACE-890C), 269,000 (ACE-890T), 265,000 (ACE-890P)					
输出连接器	可选线材					
尺寸	152.4 x 89 x 39 (mm)					

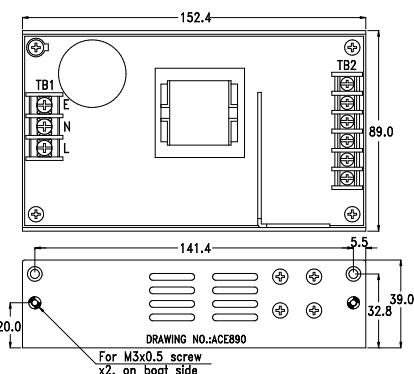

订购信息

型号	描述
ACE-890V-RS	72W 12V DC Input Open Frame AT Power Supply
ACE-890C-RS	86W 24V DC Input Open Frame AT Power Supply
ACE-890T-RS	86W 48V DC Input Open Frame AT Power Supply
ACE-890P-RS	86W 110V DC Input Open Frame AT Power Supply

可选 1

嵌入式解决方案



PN: CB-643EB-RS
30 cm DC cable to CPU card, with 20-pin ATX, HDD and SATA connectors

可选 2



ATX 底板解决方案

PN: CB-890BP-RS
30 cm DC cable to backplane, with 20-pin ATX, HDD and SATA connectors

可选 3



AT P8P9 底板解决方案

PN: CB-890P8P9-RS
30 cm DC cable AT power to P8P9, HDD and SATA connectors