


DC 输入 1U ATX 电源

ACE-830CU1


300 W 24V DC 输入 1U ATX 电源



规格

输入类型	19 ~ 36VDC					
输入电流	30A(RMS) @ 24VDC					
输出电压	+3.3V	+5V	+12V	-5V	-12V	+5Vsb
	20A	25A (3A min)	22A (1A min)	0.8A	1A	1.5A
	*+3.3V, +5V, 总功率不超过 180W *+3.3V, +5V, +12V 总功率不超过 296W					
过压保护	+5V 输出 5.74V ~ 7.0V, +12V 输出 13.4V ~ 15.6V					
效率	70%					
温度	0°C ~ 50°C (操作), -20°C ~ 80°C (存储)					
相对湿度	10% ~ 90% RH 无冷凝					
MTBF(hrs)	100,000 hr					
输出连接器	20+4-pin ATX, 4-pin 12 V CPU, 5 V (P10), 2 x SATA 和 3 x HDD					
尺寸	220 x 100 x 40.5 mm					

尺寸

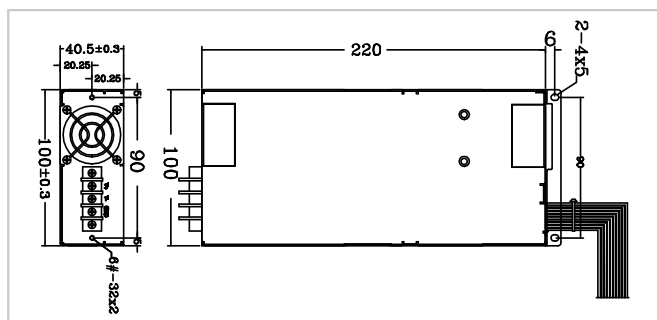

订购信息

型号	描述
ACE-830CU1-RS-R20	300W 24V DC Input 1U ATX Power Supply

ACE-717CX/715VX


12V/24V DC 输入 1U ATX 电源



规格

输入类型	9 ~ 18VDC (ACE-715VX), 19 ~ -32VDC (ACE-717CX)					
输出电压	+3.3V	+5V	+12V	-5V	-12V	+5Vsb
	6A	16A (1A min)	10A (1A min)		1A	1.5A
	6A	8A (1A min)	8A (1A min)		0.5A	1A
效率	70% (ACE-715VX), 75% (ACE-717CX)					
温度	操作: 0°C ~ 70°C (-20 可以启动) 存储: -40°C ~ 75°C					
MTBF(hrs)	100,000 hr					
输出连接器	5VSB & 电源开关线					
尺寸	198 x 97 x 39 mm					

尺寸

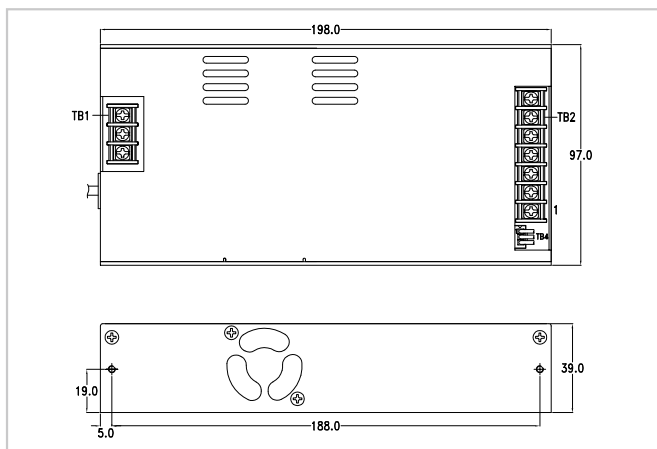

订购信息

型号	描述
ACE-715VX-RS	157W 12V DC Input ATX Power Supply
ACE-717CX-RS	170W 24V DC Input ATX Power Supply

可选 1

嵌入式解决方案

可选 2

ATX 底板解决方案



PN: CB-643EB-RS
30 cm DC cable to CPU card with 4-pin 12 V CPU, HDD and SATA connectors



PN: CB-717BP-RS
30 cm DC cable for ACE-715VX/717CX power to backplane, with 20-pin ATX, HDD and SATA connector