

ACE-890A/AP

86 W AC-DC 开放式框架 AT 电源




CB cULus



PFC

输入类型	85 ~ 264 VAC 宽范围 (ACE-890A) 90 ~ 264 VAC 宽范围 (ACE-890AP-R20)				
输出电压	+5 V	+12 V	-5 V	-12 V	+24 V
ACE-890A	10 A	2.5 A		0.5 A	
ACE-890AP	10 A (3A min)	2.5 A (0.25A min)		0.5 A	
效率	70%				
温度	ACE-890A : 0°C ~ 50°C (操作), -20°C ~ 85°C (存储) ACE-890AP : 0°C ~ 50°C (操作), -30°C ~ 70°C (存储)				
MTBF(hrs)	268,000 (ACE-890A) , 300,000 (ACE-890AP)				
输出连接器	可选线材				
尺寸	152.4 x 89 x 39 mm				

尺寸

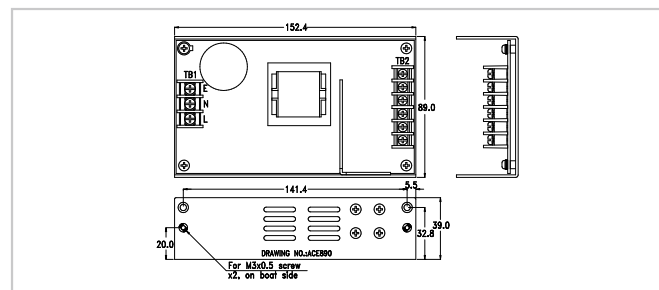

可选 1



AC 输入解决方案

PN: CB-643EC-RS
20 cm AC input cable with fuse

可选 2



嵌入式解决方案

PN: CB-643EB-RS
30 cm DC cable to CPU card, with 20-pin
ATX, HDD and SATA connectors

可选 3



ATX 底板解决方案

PN: CB-890BP-RS
30 cm DC cable to backplane, with 20-pin
ATX, HDD and SATA connectors

可选 4



AT P8P9 底板解决方案

PN: CB-890P8P9-RS
30 cm DC cable AT power to P8P9, HDD and
SATA connectors

订购信息

型号	描述
ACE-890A-RS	86W AC-DC Open Frame AT Power Supply
ACE-890AP-R20-RS	86W AC-DC Open Frame AT Power Supply, with PFC

ACE-870A/AP

70 W AC-DC 开放式框架 AT 电源




CB cULus



PFC

输入类型	85 ~ 264VAC 宽范围				
输出电压	+5V	+12V	-5V	-12V	+24V
	7A	2.5A	0.3A	0.3A	
效率	70%				
温度	0°C ~ 50°C (操作), -20°C ~ 85°C (存储)				
MTBF(hrs)	296,000 (ACE-870A) , 238,000 (ACE-870AP)				
输出连接器	可选线材				
尺寸	127 x 81 x 50 mm				

尺寸

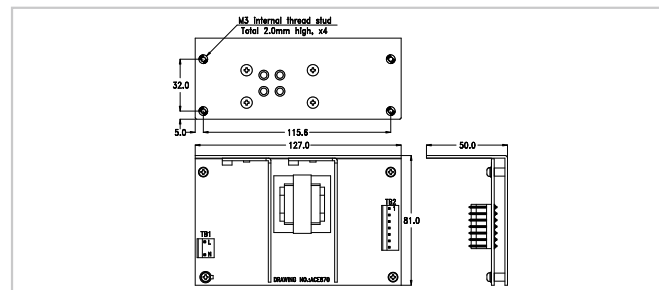

可选 1



AC 输入解决方案

PN: CB-870EC-RS
20 cm AC input cable with fuse

可选 2



嵌入式解决方案

PN: CB-870EB-RS
30 cm DC cable to CPU card, with 20-pin
ATX, HDD and SATA connectors

可选 3



ATX 底板解决方案

PN: CB-870BP-RS
30 cm DC cable to backplane, with 20-pin
ATX, HDD and SATA connectors

可选 4



AT P8P9 底板解决方案

PN: CB-870P8P9-RS
30 cm DC cable AT power to P8P9, HDD and
SATA connectors

订购信息

型号	描述
ACE-870A-RS	70W AC-DC Open Frame AT Power Supply
ACE-870AP-RS	70W AC-DC Open Frame AT Power Supply, with PFC