

AC 输入 PS/2 ATX 电源

ACE-A160A

600W PS/2 ATX 电源, 支持 ErP



New



符合 80 PLUS (BRONZE)

ErP
5Vsb < 1W Input

PFC



订购信息


型号	描述
ACE-A160A-R10	600W AC-DC PS/2 ATX Power Supply with ErP, Meet 80 PLUS (Bronze)

尺寸

REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	CABLE LENGTH
P1 24	1	+3.3VDC	ORANGE	400±15mm
	2	+3.3VDC	ORANGE	
	3	COM	BLACK	
	4	+5VDC	RED	
	5	COM	BLACK	
	6	+5VDC	RED	
	7	COM	BLACK	
	8	PW-OK	GRAY	
	9	+5Vsb	PURPLE	
	10	+12V3	Yel/Blue	
	11	+12V3	Yel/Blue	
	12	+3.3VDC	ORANGE	
	13	+3.3VDC	ORANGE	
	14	+3.3V _{sense}	BROWN	
	15	-12VDC	BLUE	
	16	COM	BLACK	
	17	PS-ON	GREEN	
	18	COM	BLACK	
	19	COM	BLACK	
	20	-5V	WHITE	
	21	+5VDC	RED	
	22	+5VDC	RED	
	23	+5VDC	RED	
	24	COM	BLACK	
P2	1	COM	BLACK	400±15mm
	2	COM	BLACK	
	3	COM	BLACK	
	4	+5VDC	RED	
P3	1	COM	BLACK	500±15mm
	2	COM	BLACK	
	3	+12V1	YELLOW	
	4	+12V1	YELLOW	
PA	1	+3.3VDC	ORANGE	400±15mm
	2	COM	BLACK	
	3	+5V	RED	
	4	COM	BLACK	
	5	+12V3	Yel/Blue	
PB	1	+3.3VDC	ORANGE	155±10mm
	2	COM	BLACK	
	3	+5V	RED	
	4	COM	BLACK	
	5	+12V3	Yel/Blue	
PI	1	+12V4	Yel/White	400±15mm
	2	COM	BLACK	
	3	COM	BLACK	
	4	+5V	RED	
PJ	1	+12V4	Yel/White	155±10mm
	2	COM	BLACK	
	3	COM	BLACK	
	4	+5V	RED	
PK	1	+5V	RED	150±10mm
	2	COM	BLACK	
	3	COM	BLACK	
	4	+12V4	Yel/White	
PC	1	+12V2	Yel/Black	400±15mm
	2	COM	BLACK	
	3	COM	BLACK	
	4	+5V	RED	
PD	1	+12V2	Yel/Black	155±10mm
	2	COM	BLACK	
	3	COM	BLACK	
	4	+5V	RED	
PE	1	+5V	RED	150±10mm
	2	COM	BLACK	
	3	COM	BLACK	
	4	+12V2	Yel/Black	

规格

输入	电压	90~265 VAC 宽范围		
	频率	47~63Hz		
	输入电流	10A(RMS)@115VAC, 5A(RMS)@230VAC		
	涌浪电流	40A 最大适用于 115VAC 80A 最大适用于 230VAC		
输出	电压	最小负载	最大负载	波纹与噪音
	+3.3V	1.5A	25.0A	50mV
	+5V	1A	25.0A	50mV
	+12V1	1A	16.0A	120mV
	+12V2	1A	16.0A	120mV
	+12V3	1A	16.0A	120mV
	+12V4	0.5A	16.0A	120mV
	-12V	0A	0.5A	120mV
	+5VSB	0A	4.0A	50mV
	+3.3VDC 和 +5VDC 最大连续组合载入的输出总功率不得超过 150 W. 最大连续 DC 输出总功率不得超过 600W.			
过压保护	5V: 5.7V-6.5V			
	12V1 ~12V4: 13.3V-16.7V			
短路保护	3.3V: 3.9V-4.5V			
	+3.3V, +5V, +12V1, +12V2, +12V3, +12V4, 24V 或 -12V 关闭和锁定			
一般规格	功率	600W		
	PFC	激活		
	保持时间	16 ms Max.		
	效率	85%		
	MTBF	100000 hr		
	温度	操作: -5°C ~ 50°C 存储: -40°C ~ 80°C		
	尺寸	140 x 150 x 86 (mm)		
	输出连接器	20+4-pin ATX x 1, 4-pin 12V CPU x 1, HDD/CDROM x 9, FDD x 2, SATA x 2, Extra +5V(P10) x 1		

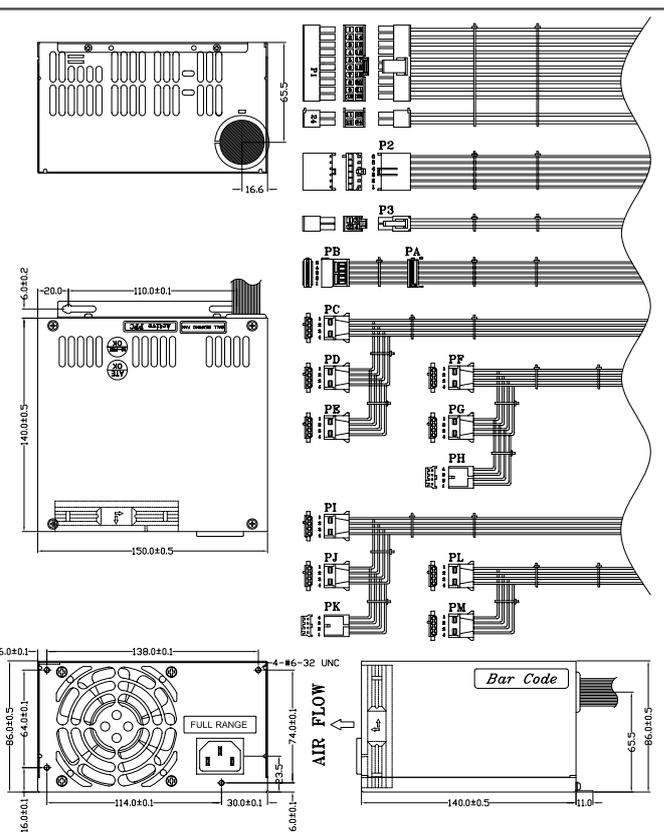

- 1 工业电脑解决方案
- 2 视频采集解决方案
- 3 嵌入式系统解决方案
- 4 工业数据采集与控制
- 5 平板电脑解决方案概览
- 6 ORing 网络通讯
- 7 电源与外设